


	Tolerances	Revisions	
		Description/Approved/Date	Approved
			M.H.I.
			01/25/03
1-20=+/-0.2 20-30=+/-0.3 30-40=+/-0.4 40-50=+/-0.5 50-100=+/-0.75 100-300=+/-1.5 Angles=+/-1 Dimensions are in Millimeters	NOTES (plating thickness in micro-inches): 1. Per QQ-B-626 2. Per QQ-S-764 3. Per QQ-C-530 4. Per QQ-B-750	5. Per MIL-P-19468 6. Per ZZ-R-765 7. Per WW-T-799 8. Gold pl. 5 min. over nickel pl. 50 min. over copper scribe	9. Nickel pl. 100 min. over copper scribe 10. Per QQ-P-35 11. Gold pl. 30 min. over nickel pl. 50 min. over copper scribe

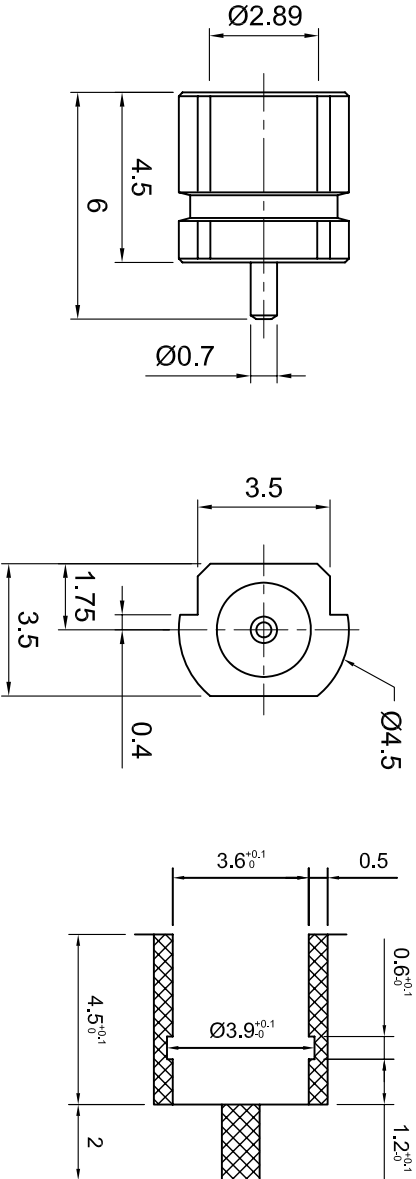

ITEM	MATERIAL	FINISH	 Lighthorse Technologies, Inc. 5640 Kearny Mesa Road, Suite N San Diego, California 92111 Part Number: LT-MCSF96GT		
Connector Body	Brass, Note 1	Gold, Note 8			
Center Contact: Female	Beryllium Copper, Note 3	Gold, Note 11			
Insulation	Teflon, Note 5	None			
Ferrule	--	--			
Gasket	--	--			
Hex Nut	--	--	Description MMCX edge mount PCB jack. Gold plated brass body. Teflon dielectric. Scale 5:1		
Lock Washer	--	--			
			Drawing No.	File Name	
			MMCX/MCSF96	MCSF96	