

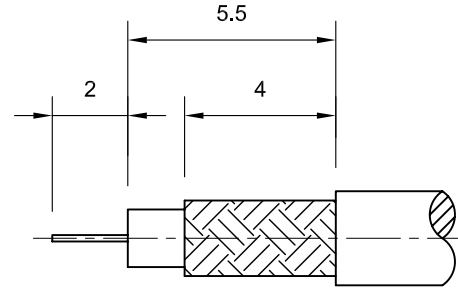
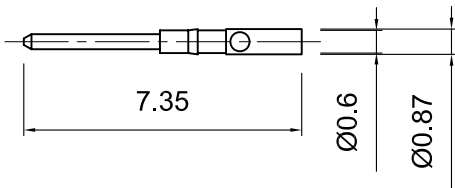


Tolerances 1-20=+/-0.2 20-30=+/-0.3 30-40=+/-0.4 40-50=+/-0.5 50-100=+/-0.75 100-300=+/-1.5 Angles=+/-1 Dimensions are In Millimeters	Revisions	Approved	Date
	Description/Approved/Date	M.H.	01/06/00
		Checked	Date
		M.H.	01/06/00
	Drawn	Date	
	K.R.E.	01/05/00	
	NOTES (plating thickness in micro-inches): 1. Per QQ-B-626 2. Per QQ-S-764 3. Per QQ-C-530 4. Per QQ-B-750 5. Per MIL-P-19468 6. Per ZZ-R-765 7. Per WW-T-799 8. Gold pl. 5 min. over nickel pl. 50 min. over copper strike 9. Nickel pl. 100 min. over copper strike 10. Per QQ-P-35 11. Gold pl. 30 min. over nickel pl. 50 min. over copper strike		

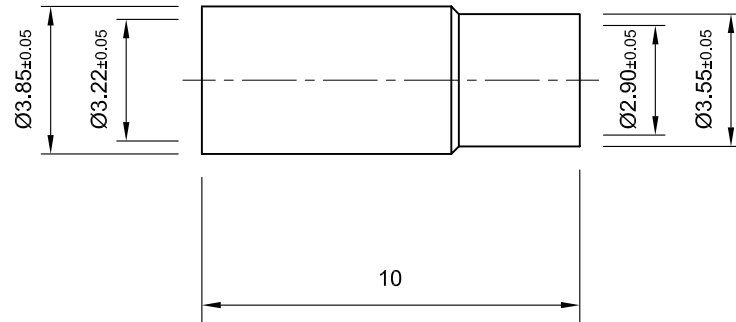

RECOMMENDED STRIPPING DIMS

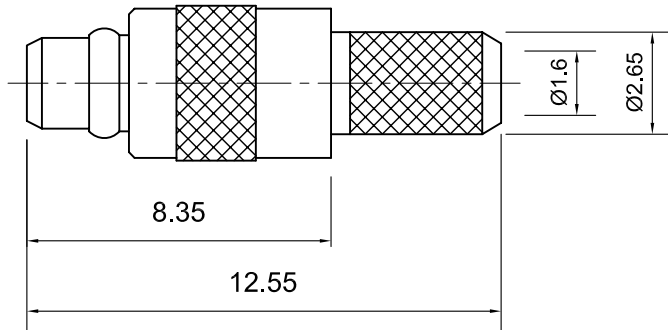

ITEM	MATERIAL	FINISH
Connector Body	Brass, Note 1	Gold, Note 8
Center Contact: Male	Brass, Note 1	Gold, Note 11
Insulation	Teflon, Note 5	None
Ferrule	Annealed Copper, Note 7	Same as body
Gasket	--	--
Hex Nut	--	--
Lock Washer	--	--

Lighthouse Technologies, Inc.
9511 Ridgehaven Court, Suite B
San Diego, CA 92123
Part Number:
LTI-MCSM11GT-316

Description		
MMCX straight crimp plug for RG-316 cable group. Gold plated		
brass body, teflon dielectric. (P/N formerly LTI-MMXSM11GT-316)		
Scale	Drawing No.	File Name
5:1		MCSM11-316