
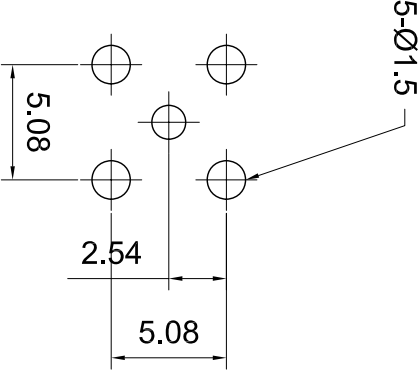
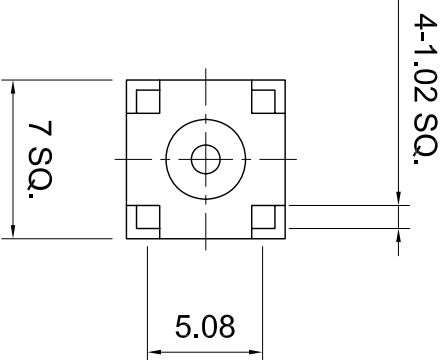


Tolerances		Revisions	
1-20=+/-0.2	20-30=+/-0.3	30-40=+/-0.4	40-50=+/-0.5
50-100=+/-0.75	100-300=+/-1.5	Angles=+/-1	
Dimensions are in Millimeters			
Description/Approved/Date		Approved	
		M.H.	Date
		01/14/10	
		Checked	Date
		M.H.	01/14/10
		Drawn	Date
		K.R.E.	01/14/10
NOTES (plating thickness in micro-inches):			
1. Per QQ-B-626	2. Per QQ-S-764	3. Per QQ-C-530	4. Per QQ-B-750
5. Per MIL-P-19468	6. Per ZZ-R-765	7. Per WW-1-799	8. Gold pl. 5 min. over nickel pl. 50 min. over copper strike
9. Nickel pl. 100 min. over copper strike	10. Per QQ-P-35	11. Gold pl. 20 min. over nickel pl. 50 min. over copper strike	

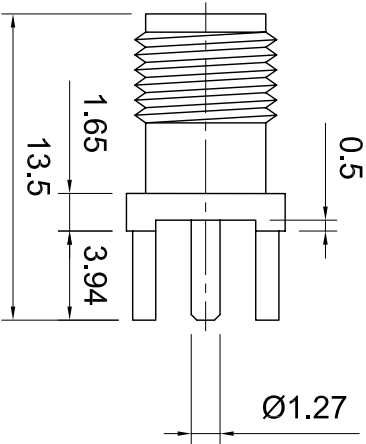

RECOMMENDED PCB LAYOUT

ITEM	MATERIAL	FINISH
Connector Body	Brass, Note 1	Gold, Note 8
Center Contact: F	BeCu, Note 3	Gold, Note 11
Insulation	Teflon, Note 5	None
Ferrule	--	--
Gasket	--	--
Hex Nut	--	--
Lock Washer	--	--

Description	
SMA PCB Jack, Through Hole with step, Gold plated	
Brass body, Teflon dielectric.	
Scale	1:1
Drawing No.	SASF54GT-X12
File Name	SASF54GT-X12

 Lighthorse Technologies, Inc. 9511 Ridgelyaven Ct, Suite B San Diego, California 92123 Part Number: LTI-SASF54GT-X12	
--	--