




Tolerances		Revisions	
1-20=+/-0.2		Approved	Date
20-30=+/-0.3		M.H.	
30-40=+/-0.4		Checked	Date
40-50=+/-0.5		M.H.	
50-100=+/-0.75			
100-300=+/-1.5			
Angles=+/-1			
Dimensions are in Millimeters		Drawn	Date
		K.R.E.	11/17/06
NOTES (plating thickness in micro-inches):			
1. Per QQ-B-626	5. Per MIL-P-19488	6. Per ZZ-R-765	9. Nickel pl. 100 min. over copper strike
2. Per QQ-S-764	7. Per WW-1-799	7. Per WW-1-799	10. Per QQ-P-35
3. Per QQ-C-530	8. Gold pl. 5 min. over nickel pl. 50 min. over copper strike	8. Gold pl. 5 min. over nickel pl. 50 min. over copper strike	11. Gold pl. 30 min. over nickel pl. 50 min. over copper strike
4. Per QQ-B-750			

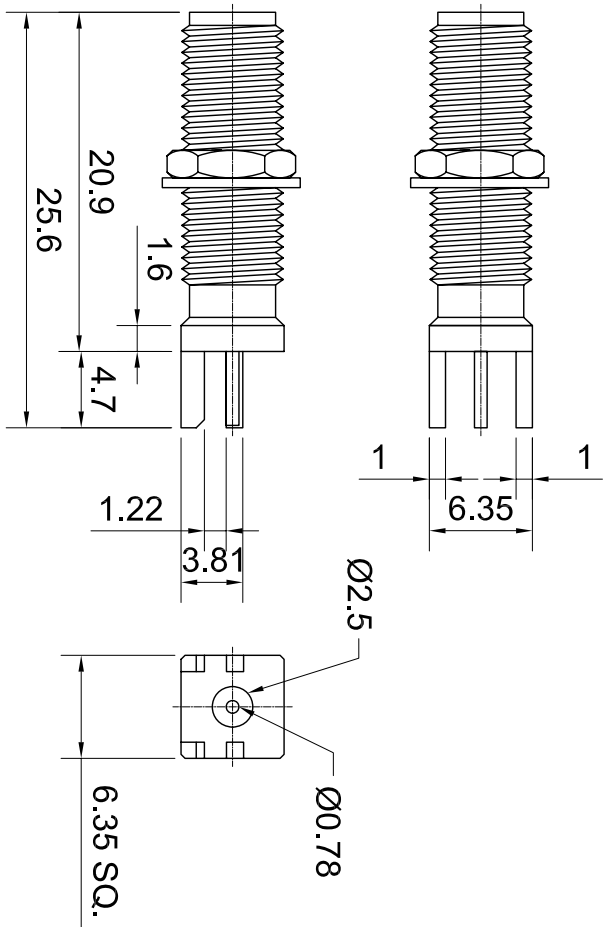

LANDING PAD DIMENSIONS

ITEM	MATERIAL	FINISH	Description		
Connector Body	Brass, Note 1	Gold, Note 8	 Lighthorse Technologies, Inc. 9511 Ridgely Court, Suite B San Diego, CA 92123 Part Number: LTI-SASF55LGT-4		
Center Contact: Female	BeCu, Note 3	Gold, Note 11			
Insulation	Teflon, Note 5	None			
Ferrule	--	--			
Gasket	--	--			
Hex Nut	Brass, Note 1	Same as body	Gold plated brass body, Teflon dielectric.		
Lock Washer	Brass, Note 1	Same as body			
			Scale	Drawing No.	File Name
			3:1		SASF55LGT-4