


Tolerances		Revisions	
1-20=+/-0.2		Description/Approved/Date	Approved M.H.
20-30=+/-0.3		Checked M.H.	Date
30-40=+/-0.4			
40-50=+/-0.5			
50-100=+/-0.75			
100-300=+/-1.5			
Angles=+/-1			
Dimensions are in Millimeters			
NOTES (plating thickness in micro-inches):		12/28/04	
1. Per QQ-B-626		2. Per WW-1-799	
3. Per QQ-C-530		4. Per QQ-B-750	
5. Per MIL-P-19488		6. Per ZZ-R-765	
7. Per WW-1-799		8. Gold pl. 5 min. over nickel pl. 50 min. over copper strike	
9. Nickel pl. 100 min. over copper strike		10. Per QQ-P-35	
11. Gold pl. 30 min. over nickel pl. 50 min. over copper strike			

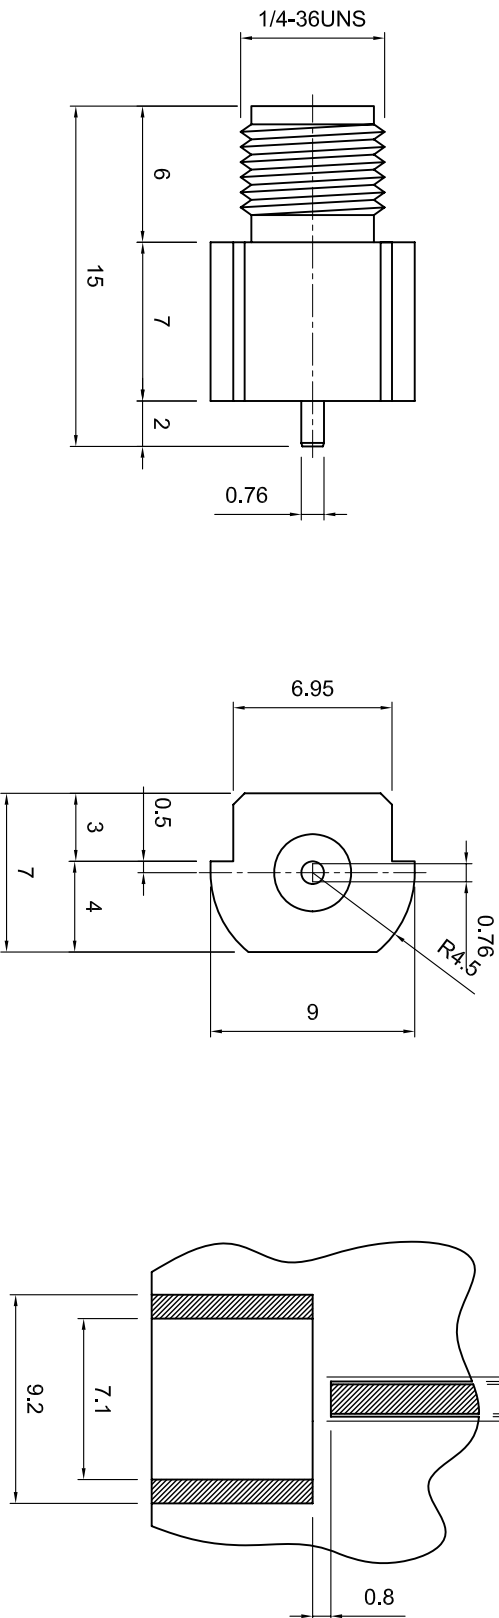

ITEM	MATERIAL	FINISH	 Lighthorse Technologies, Inc. 5640 Keamy Mesa Road, Suite N San Diego, California 92111 Part Number: LTI-SASF56NT	
Connector Body	Brass, Note 1	Nickel, Note 9		
Center Contact: Female	Brass, Note 1	Gold, Note 11	Description SMA straight edge mount jack.	
Insulation	Teflon, Note 5	None		
Ferrule	--	--	Nickel plated brass body, Teflon dielectric.	
Gasket	--	--		
Hex Nut	--	--	Scale 3:1	
Lock Washer	--	--		
			Drawing No.	File Name SASF56