
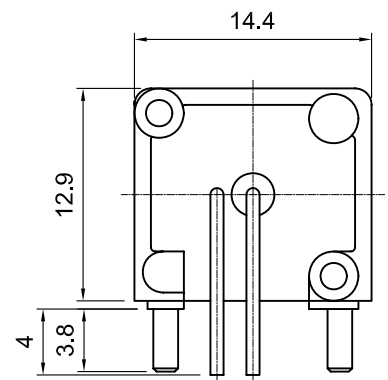


All components used in this connector conform to RoHS standards. Approved by: Date:	LEAD FREE  RoHS COMPLIANT	Tolerances 1-20=+/-0.2 20-30=+/-0.3 30-40=+/-0.4 40-50=+/-0.5 50-100=+/-0.75 100-300=+/-1.5 Angles=+/-1 Dimensions are in Millimeters	Revisions Description/Approved/Date	Approved M.H.	Date
				Checked M.H.	Date
				Drawn K.R.E.	Date
			NOTES (plating thickness in micro-inches): 1. Per QQ-B-626 2. Per QQ-S-764 3. Per QQ-C-530 4. Per QQ-B-750		
			5. Per MIL-P-19468 6. Per ZZ-R-765 7. Per WW-T-799 8. Gold pl. 5 min. over nickel pl. 50 min. over copper strike		
			9. Nickel pl. 100 min. over copper strike 10. Per QQ-P-35 11. Gold pl. 5 min. over nickel pl. 50 min. over copper strike		

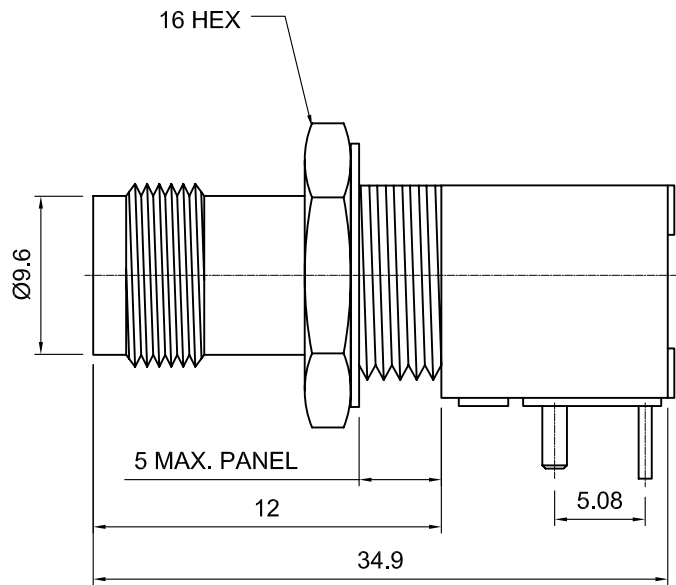

ITEM	MATERIAL	FINISH	 Lighthouse Technologies, Inc. 9511 Ridgehaven Court, Suite B San Diego, CA 92123 Part Number: LTI-TLF54MNDM			
Connector Body	Brass, Note 1	Nickel, Note 9				
Center Contact: F	Phosphor Bronze	Gold, Note 11				
Insulation	Delrin	None				
Ferrule	--	--				
Gasket	--	--				
Hex Nut	Brass, Note 1	Same as body				
Lock Washer	Brass, Note 1	Same as body				
			Description TNC right angle 50 ohm commercial PCB jack medium profile (12.9 mm). Nickel plated Brass body, metal housing, Delrin dielectric.	Scale 2:1	Drawing No.	File Name