

All components used in this connector conform to RoHS standards.





| Tolerances     |
|----------------|
| 1-20=+/-0.2    |
| 20-30=+/-0.3   |
| 30-40=+/-0.4   |
| 40-50=+/-0.5   |
| 50-100=+/-0.75 |
| 100-300=+/-1.5 |
| Angles=+/-1    |

Dimensions are in Millimeters

| Revisions                                  |                                                               | Approved                                                       | Date     |
|--------------------------------------------|---------------------------------------------------------------|----------------------------------------------------------------|----------|
| Description/Approved/Date                  | Checked                                                       | M.H.                                                           | 10/12/00 |
|                                            | M.H.                                                          |                                                                | 10/12/00 |
|                                            | Drawn                                                         | K.R.E.                                                         | 10/12/00 |
| NOTES (plating thickness in micro-inches): |                                                               |                                                                |          |
| 1. Per QQ-B-626                            | 5. Per MIL-P-19468                                            | 9. Nickel pl. 100 min. over copper strike                      |          |
| 2. Per QQ-S-764                            | 6. Per ZZR-765                                                | 10. Per QQ-P-35                                                |          |
| 3. Per QQ-C-530                            | 7. Per WW-1-799                                               | 11. Gold pl. 5 min. over nickel pl. 50 min. over copper strike |          |
| 4. Per QQ-B-750                            | 8. Gold pl. 5 min. over nickel pl. 50 min. over copper strike |                                                                |          |

Approved by:  
Date:

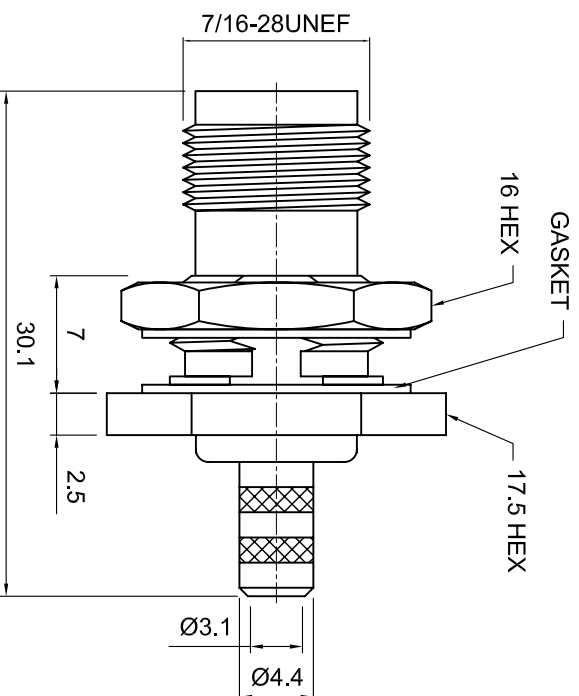

| ITEM              | MATERIAL                | FINISH        |
|-------------------|-------------------------|---------------|
| Connector Body    | Brass, Note 1           | Nickel        |
| Center Contact: F | Brass, Note 1           | Gold, Note 11 |
| Insulation        | Teflon, Note 5          | None          |
| Ferrule           | Annealed Copper, Note 7 | Same as body  |
| Gasket            | Silicone Rubber         | none          |
| Hex Nut           | Brass, Note 1           | Same as body  |
| Lock Washer       | Brass, Note 1           | Same as body  |

**Lighthorse Technologies, Inc.**  
9511 Ridgely Court, Suite B  
San Diego, CA 92123

Part Number:  
**LT1-TSF13RNT-58**

Description  
TNC bulkhead crimp jack for RG-58

|              |                            |                       |
|--------------|----------------------------|-----------------------|
| Scale<br>2:1 | Drawing No.<br>TSF13RNT-58 | File Name<br>TSF13-58 |
|--------------|----------------------------|-----------------------|